

## Relationship between core impurity, fuel and thermal diffusivities in L and H mode JET plasmas.

M.E. Puiatti<sup>1</sup>, M. Valisa<sup>1</sup>, L. Garzotti<sup>1</sup>, P. Mantica<sup>4</sup>, A. Bortolon<sup>1</sup>, L. Carraro, I. Coffey<sup>2</sup>, D. Kalupin<sup>3</sup>, M. Mattioli<sup>1</sup>, M. Tokar<sup>3</sup>, H. Weisen<sup>5</sup> and contributors to the EFDA-JET workprogramme\*

<sup>1</sup> Consorzio RFX - Associazione Euratom-Enea sulla Fusione, I-35127 Padova, Italy, <sup>2</sup> EURATOM/UKAEA Fusion Association, Culham Science Center, Abingdon, Oxon, OX14 3DB, UK - <sup>3</sup> IPP, Forschungszentrum Jülich GmbH, EURATOM Association, D-52425 Jülich, Germany <sup>4</sup>IFP- Istituto di Fisica del Plasma-CNR-EURATOM, 20125Milano, Italy, <sup>5</sup> CRPP, Ecole Polytechnique Fédérale de Lausanne CH-1015 Switzerland

**Introduction** – Impurity densities are a key factor in the determination of a reactor performance. If the viability of a radiation shield generated at the edge by seeding impurities to dissipate convective losses is a matter of debate, the presence of impurities in the core is clearly undesired because of the deleterious consequences of radiation losses and plasma dilution on fusion reactivity. In particular the accumulation of impurities and the associated risk of disruptions cannot be tolerated.

A figure of merit in this context is the ratio of the transport parameters of the impurities to those of main fuel and energy. In the published literature  $D_{imp}/\chi_e$ , or more often  $\tau_{imp}/\tau_{Ee}$ , is reported to vary widely, depending on a variety of parameters such as elongation, triangularity, q95, [1] and is theoretically predicted to be  $\sim 1$  in case of electrostatic turbulent transport [2]. In this paper we analyse the ratios  $D_{imp}/\chi_e$  and, to a lesser extent,  $D_{imp}/D_D$  in a group of JET discharges devised to probe heat and particle

Shot	BT	Ip	ne	Te	Ti	NBI	ICRH	$\rho_{ICRH}$
	T	MA	E19m <sup>-3</sup>	keV	keV	MW	MW	
55802	3.45	1.85	3	6.3	3.1	3.2	3.6	0.13
55804	3.36	1.6	2.8	3.7	2.8	0	3.5	0.18
55805	3.36	1.6	2.8	4.4	3.5	3.2	3.6	0.18
55807	3.25	1.6	2.8	3.5	3.5	6	3.7	0.32
55809	3.25	1.6	2.7	4.	4.	9.1	3.7	0.32
58149	3.28	1.8	3.4	5.2	5	14.3	2.8	0.37
58143	3.28	1.8	3.0	5.7	4.5	13.4	2.8	0.37

(main gas and impurities) diffusivities by means of transient perturbations; namely, electron heating modulation, shallow pellet injection and laser ablation of nickel targets, respectively.

**The experiment** – Several L-mode and ELMy H-mode JET discharges have been analysed:

their main characteristics are summarised in the table. Electron heating modulation was obtained by applying mode converted ICH and adding  $\sim 20\%$  of He<sup>3</sup>[3].

**Analysis tools- Heat transport analysis.** The heat pulse propagation analysis of the L-mode shots was detailed in [3]. It qualified the degree of stiffness of Te according to a critical gradient empirical model. More specifically shot 55802, featuring electron heating in the core ( $\rho_{ICRH} = 0.13$ ) resulted above the critical gradient for  $\rho > 0.1$ , while

\* See annex of J. Pamela et al, "Overview of JET Results", Fusion Energy 2002 (Proc. 19th Int. Conf. Lyon, 2002), IAEA, Vienna (2003).

shots 55809 and 58149, with a more external electron heat deposition ( $\rho_{ICRH} = 0.32$  and  $0.37$ ) were above stiffness for  $\rho > 0.3$  and  $\rho > 0.35$  respectively.

**Impurity transport analysis.** Transport parameters of Ni following laser ablation have been deduced by means of a 1D-impurity transport model [4] that simulates available Ni spectroscopic lines, inverted soft-X-ray brightness and bolometer data. As boundary condition the time behaviour of a NI XVIII emission line is tracked. The intrinsic carbon behaviour has also been considered, essentially for the calculation of the neoclassical transport of Ni by means of NCLASS [5]. To avoid subjective criteria a minimisation procedure has been used to converge to the best choice of transport parameters and identify a degree of confidence of the results. Unlike other cases, in the shots here analysed it has not been necessary to modify transport parameters during the penetration phase and the subsequent decay phase of the Ni pulse; one single couple of diffusivity and convection has been adequate for a satisfactory simulation of the whole sequence.

**Deuterium transport analysis** – Transport parameters of deuterium have been analysed for shots 55802, 55809 by means of the JETTO transport code [6].

**Stability analysis** – To correlate the experimentally deduced transport parameters with the underlying instabilities the collisionless linear stability code KINEZERO has been used [7] in the regions where the applicability criteria are met.

**Results – L mode.** Diffusivity  $D_{Ni}$  and convection  $v$  of nickel of two L-mode shots are plotted in Fig. 1 together with  $\chi_e$  from the heat modulation analysis as well as  $D_D$  and  $v_D$  from the he analysis of pellet. Neoclassical diffusion, including the effect of the presence of carbon, is much smaller than the experimental one.  $D_{Ni}$  in shot 55802 is everywhere higher than in shot 55809. Also, in shot 55802 the low diffusion region in the core is narrower than in 55809. In both discharges the pinch velocity is inward all along the

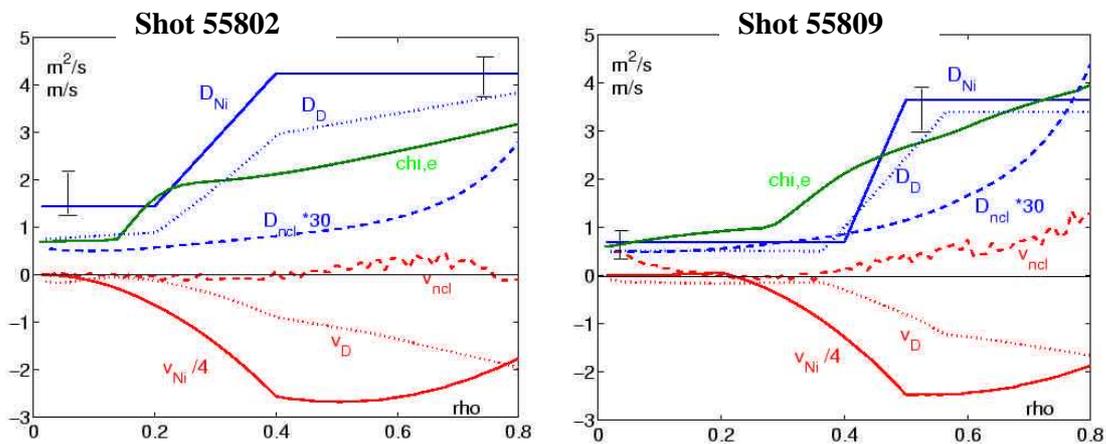


Fig.1- Effective and neoclassical nickel  $D_{Ni}$  and  $v_{Ni}$ ,  $\chi_e$  in green from heat modulation analysis,  $D_D$  and  $v_D$  from pellet analysis for the two L-mode shots . Error bars on the diffusion of Ni are only a degree of confidence of the simulation.

radius and of several m/s, much higher than the neoclassical one. In analogy with  $D_{Ni}$  a central low convection region seems to be present in both shots, narrower in 55802.  $\chi_e$  and  $D_{Ni}$  show several similarities; in particular they share the radius at which a transition in transport occurs.

The difference of transport in the two L mode discharges can be also qualitatively grasped from the contour plots of the inverted SXR emissivity (Fig. 2) that clearly shows how Ni penetrates much faster in shot 55802 and how the penetration speed in both cases slows down at about the radius where  $D_{Ni}$  drops and where also the electron temperature critical gradient is crossed [3]. Simulations of the effects of the shallow deuterium pellet

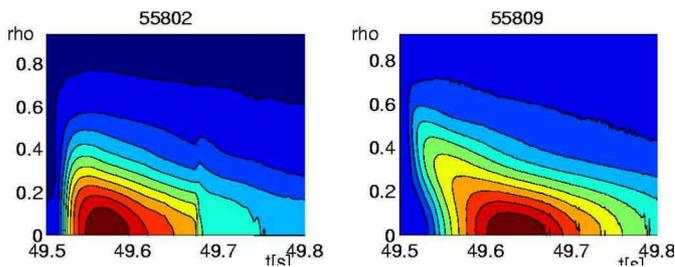


Fig. 2 Contour plots of the inverted SXR emissivity versus time: Ni penetrates at 49.5 sec much faster in shot 55802.

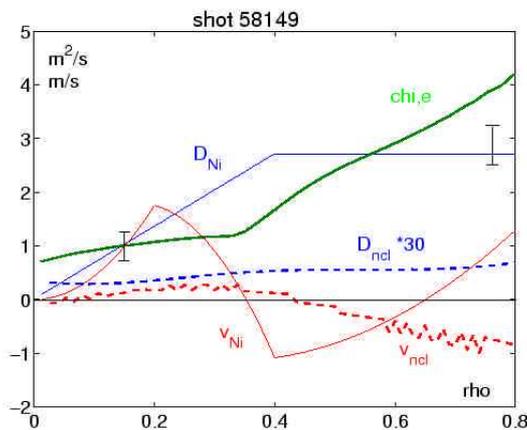


Fig. 3 - Effective and neoclassical nickel diffusion and convection and  $\chi_e$  for the H mode shot.

have shown that the diffusion of the deuterium is comparable to that of Ni; the pinch velocity of D is lower than that of Ni but the shape is similar.

**H-mode.** In the H-mode example (Fig.3)  $\chi_e$  and  $D_{Ni}$  are also similar with a transition from low to high transport around  $r/a=0.35$  (for this shot  $\chi_e$

is taken from a similar shot, 58148, without Ni LBO). The pinch velocity is about 1 m/s,

lower than in the L-mode shots. The effective outward pinch in the core is required to simulate a SXR radial profile less peaked than the temperature one. The neoclassical contribution to diffusivity is negligible. Neoclassical convection remains lower than the effective one.  $D_D$  is still to be analysed.

**Discussion.** The close relationship between  $\chi_e$  and  $D_{Ni}$  shown above can perhaps be emphasised recalling the main results of the heat diffusivity analysis of the same shots [3]. Indeed  $D_{Ni}$  is high or low depending on where the electron temperature gradient is

above or below the critical threshold, just like heat diffusivity. To stress the analogy, we observe that, as found for the stiffness level [8], in the region above the critical threshold  $D_{Ni}$  appears to depend on the ion temperature inverse gradient length  $R/L_{Ti}$  (Fig.4). The

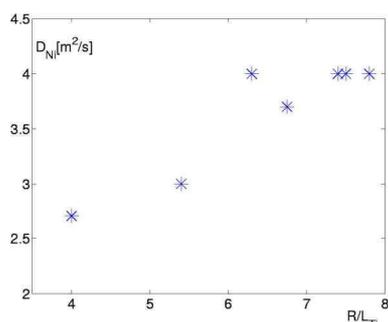


Fig. 4 - Dependence of  $D_{Ni}$  in the stiff region on  $R/L_{Ti}$  for the seven analysed shots.

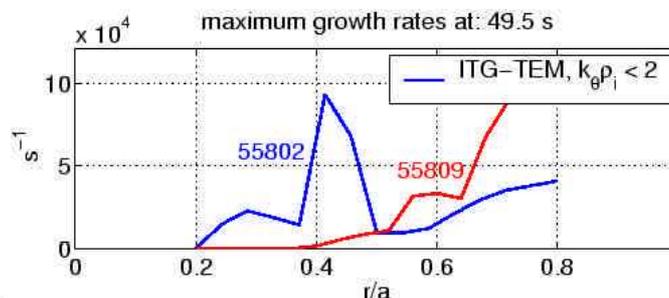


Fig5- Growth rates of the dominating instabilities, for  $k_{\theta} \rho_i < 2$  from KINEZERO as a function of the minor radius, in the range  $0.2 < r/a < 0.8$ .

differences in shots 55802 and 55809 mirror the different spatial distribution of the dominating electrostatic instabilities. Fig. 5 shows the maximum growth rates  $\gamma$  of ITG/TEM instabilities as a function of minor radius. For both L-mode shots and for toroidal wavenumber  $n < 100$  (corresponding to ITG/TEM instabilities)  $\gamma$  is sizeable just at the radius where the transport transition occurs. We mention that in shot 55802 also some ETG activity ( $n > 100$ ) shows up in the centre (not shown in Fig 5).

### Conclusions.

Ni LBO injections in shots where also transient perturbations of density and electron temperature were available have shown that:  $D_{Ni}$  and  $v_{Ni}$  are highly anomalous in the analysed L-mode and H-mode discharges;  $D_{Ni} \sim \chi_e$ ; nickel and deuterium have similar diffusion in the plasma core;  $D_{Ni}$  profiles are well correlated with the profiles of electron temperature inverse gradient length, showing transition from low to high transport when the critical value found for electron heat is exceeded. This behaviour is also consistent with that of the maximum growth rates of electrostatic ITG/TEM instabilities.

**Acknowledgements** C. Bourdelle's help in dealing with Kinezzero is kindly acknowledged.

### References

- [1] M.Mattioli et al Nucl. Fus. 35 (1995) 1115 & M.R. Wade et al. Phys. Plasmas, 2 (1995) 2357 & E. Scavino et al. Plasma Phys and Contr. Fus., 45 (2003), 1961
- [2] X. Garbet, "Physics of anomalous transport in Tokamaks", this conference
- [3] P.Mantica et al. IAEA 2002, EX/P1-04 & P.Mantica et al., EPS 2003, vol.27A-O3.1A
- [4] M.Mattioli et al., J. Phys. B 34 (2001) 127
- [5] W.A. Houlberg et. Al. , Phys. of Plasmas, 4 (1997) 3230
- [6] Cenacchi G Taroni A, Report ENEA-RT-T113-88-5
- [7] C. Bourdelle et al., Nucl. Fus. 42 (2002) 892
- [8] P. Mantica et al, "Predictive Modelling of Te modulation experiments in JET Lmode and H mode plasmas" this conference.